

# Side 25

## TECHNICAL FEATURES



### Description

NOT CARRIAGEABLE LED road marker. The product must be installed outside the roadway

### OPTICAL FEATURES



Compliance	EN1463-3		
Light source	6 LEDs each side		
Optics	Single-Side / Double-Side		
Colour	Amber / Red-White		
Luminous Intensity	> 25 cd		
Type of Light	Steady Light	Flashing Light	Sequential flashing light
Optical Group Life	> 50'000 Hours		

### ELECTRICAL FEATURES

Power Supply	11 Vdc ÷ 48 Vdc		
Power consumption	0.44 W@48V (Single-Side)	0.85 W@48V (Double-Side)	
Insulation class	Class III		

### MECHANICAL FEATURES

Operating Temperature	-10 °C ÷ +55 °C		
Material	Polycarbonate ULV0		
IP Protection Degree	IP67		
Weight	280 g		
Dimensions	90 mm x 128 mm x 25 mm		
Fixing	2 fixing holes		

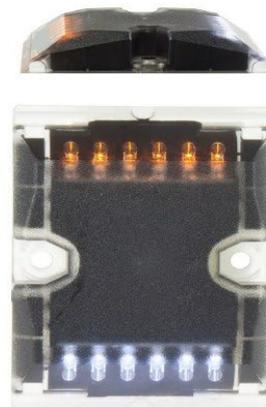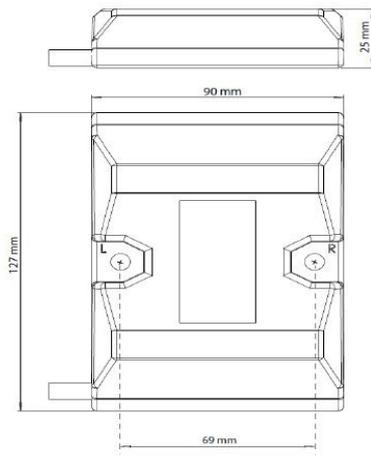

Rev. 3.0  
06/04/2023

Approved TEC

Approved AQ